



(51) International patent classification⁷:
31/02, 23/00

F16B 41/00,

(71) Applicant (for all designated States except US): BEHR
GMBH & CO. KG [DE/DE]; Mauserstrasse 3, 70469
Stuttgart (DE).

(21) International application number: PCT/EP2004/013271

(22) International filing date: 23 November 2004 (23.11.2004)

(72) Inventor; and
(75) Inventor/Applicant (US only): WILBERT, Ralf
[DE/DE]; Schulstrasse 22, 82216 Gernlinden (DE).

(25) Language of filing: German

(26) Language of publication: German

(74) Joint Representative: BEHR GMBH & CO. KG;
Intellectual Property, G-IP, Mauserstrasse 3, 70469
Stuttgart (DE).

(30) Data relating to the priority:
103 59 357.8 16 December 2003 (16.12.2003)


DE (81) Designated states (unless otherwise indicated, for
every kind of national protection available): AE, AG,
AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY,

[continued on next page]

As printed

(54) Title: ARRANGEMENT FOR FIXING A HEAT EXCHANGER, PARTICULARLY A COOLING MODULE IN A MOTOR
VEHICLE

(54) Bezeichnung: ANORDNUNG ZUR BEFESTIGUNG EINES WÄRMEÜBERTRAGERS, INSBESONDERE EINES KÜHL-
MODULS IN EINEM KRAFTFAHRZEUG

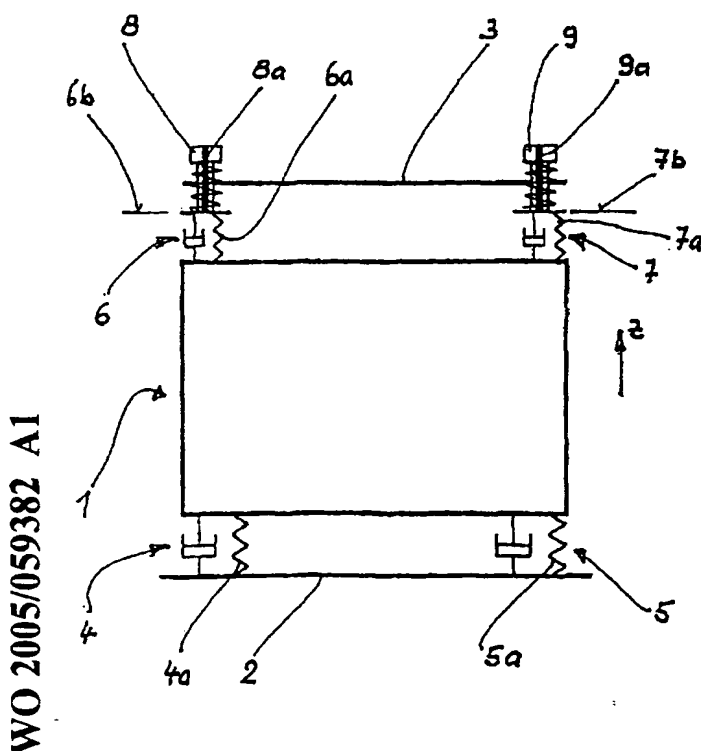

(57) Abstract: The invention relates to an arrangement for fixing a heat exchanger (1), particularly a cooling module in a motor vehicle, preferably at four, i.e. two upper and two lower, fixing points (4, 5, 6, 7). Interengaging fixing means are provided on the heat exchanger (1) and retaining means are provided on the motor vehicle (2, 3). According to the invention, at least one fixing means, preferably the two upper fixing means, is/are embodied as an elastomer bearing (6a, 7a) and at least one retaining means, preferably the two upper retaining means, is/are embodied as a screw bolt (8, 9) with path limitation (8a, 9a), which is supported on the motor vehicle (3) and on the elastomer bearing (6a, 7a) in a substantially strainless manner.

(57) Zusammenfassung: Die Erfindung betrifft eine Anordnung zur Befestigung eines Wärmeübertragers (1), insbesondere eines Kühlmoduls in einem Kraftfahrzeug, vorzugsweise an vier, zwei oberen und zwei unteren, Befestigungsstellen (4, 5, 6, 7), wobei miteinander in Eingriff stehende Befestigungsmittel am Wärmeübertrager (1) und Haltemittel am Kraftfahrzeug (2, 3) vorgesehen sind. Es wird vorgeschlagen, dass mindestens ein Befestigungsmittel, vorzugsweise die zwei oberen, als elastomeres Lager (6a, 7a) und mindestens ein Haltemittel, vorzugsweise die zwei oberen, als Schraubbolzen (8, 9) mit Wegbegrenzung (8a, 9a) ausgebildet

[continued on next page]

BZ, CA, CH, CN, CO, CR, CU, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

- *of inventorship (Rule 4.17(iv) for the following designation US*

(84) Designated states *(unless otherwise indicated, for every kind of regional protection available):* ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR,

Published:

- *with International Search Report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For an explanation of the two-letter codes and the other abbreviations, reference is made to the explanations ("Guidance Notes on Codes and Abbreviations") at the beginning of each regular edition of the PCT Gazette.